

# KERATHERM® Bond 100 RT


## KERATHERM® Thermal Adhesives

### Benefits

- High bond strength
- Room temperature curing
- Thixothropic and filling surface structures
- Very soft to compensate mechanical impacts like vibrations

Properties	Unit	100 RT
Colour		brown
Mixing ratio		1:1
Curing	°C	20 min RT
Thermal conductivity $\lambda^*$	W/mK	1.5
Thermal resistance $R_{th}$	K/W	1.66
Hardness	Shore A	20 - 35
Lap shear strength****	MPa	>15
Dielectric breakdown voltage $U_{d;AC}^{**}$	kV	6.0
Density	g/cm <sup>3</sup>	2.1
Viscosity***	Pas	40 - 70
Application temperature	°C	-40 to +180

\* Measured @ thickness 1mm   \*\* Measured @ thickness 0.5 mm   \*\*\* Shear rate 4.6s<sup>-1</sup> / 25°C  
\*\*\*\* Surface 25x25mm | 0.5mm thickness | (Alu / Alu)

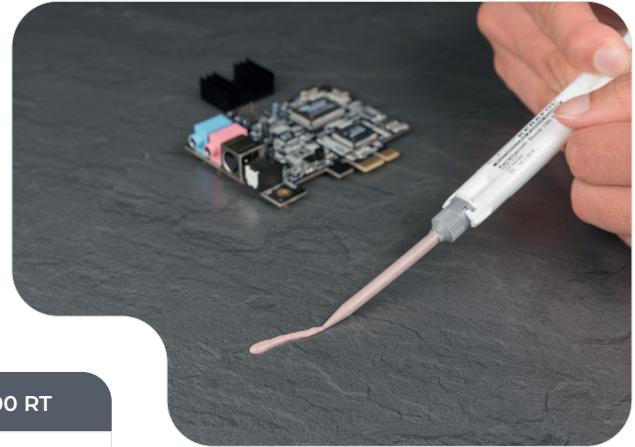

### Application Notes

- All surfaces should be even and free from oil, grease or dust. Clean surface with a solvent (e.g. acetone, thinner, etc.).
- Screw emulsion tube onto the cartridge.
- Squeeze adhesive out of the emulsion tube (in a strand of ca. 3 cm), until the adhesive emitted is of consistent light brown colour. Adhesive that is not of consistent colour will not bind and is thus to be disposed of.
- Evenly spread the adhesive on one of the surfaces to be bonded.
- Bond the components.
- Briefly press the components onto each other and avoid moving them for the next 30 minutes. If bonded at an angle or overhead, please secure the components.
- The initial hardness is achieved after 15 minutes, final hardness is achieved after four hours.

### Packing units:

- Syringe: 5 ml
- Double cartridge: 50 ml & 400 ml
- Hobbock set with 34,5 kg per component

Special packing on request!



## Note

### **Disclaimer of Warranties and Limitation of Liability**

The specifications provided in this data sheet do not constitute a guarantee or warranty of specific product properties („quality guarantee“). These specifications are derived from our standardized testing procedures conducted under controlled laboratory conditions and are intended to describe the typical properties of the products as expected under standard applications. Variations may occur depending on the specific application. Accordingly, it is the responsibility of the customer to test and evaluate the products for their intended use, and adjustments to the application may be required.

The customer assumes full responsibility for the safety and functionality of their applications in which these products are integrated. Appropriate safety measures must be implemented to prevent bodily injury, fire, or other damages resulting from product defects. The customer is also responsible for ensuring that the design of their application complies with all applicable laws, regulations, codes, and standards. Unless expressly authorized by us in writing, our products must not be used in any application where product failure or the consequences thereof could reasonably be expected to result in personal injury or harm. We make no representations, warranties, or assurances regarding the accuracy, completeness, or suitability of the information contained herein, including, without limitation, any warranty of non-infringement of third-party intellectual property rights.

We disclaim all liability arising from the application or use of the products described in this document. This document does not grant any license, express or implied, under any patents, copyrights, trade secrets, or other intellectual property rights, whether ours or those of third parties. Furthermore, we make no warranty or guarantee against potential infringement of third-party intellectual property rights arising from the use or application of our products.

Products may contain substances subject to regulatory labeling requirements; such information is provided in the corresponding safety data sheets. This document supersedes all prior information and may be updated or replaced at our discretion. We reserve the right to make changes to this document without notice.

**04-2025**